

| ITEM NO. | PART NUMBER | DESCRIPTION   |   | COMPONENT NOTES |
|----------|-------------|---|---|-----------------|
| 1        | 50-00129    | Connector, dc plug, 5.5x2.5xL18.5 mm, molding style, spring contacts      | 1 |                 |
| 2        | 30-00415    | Wire, 2C TS, 18 AWG, UL2468, 300V, 80°C, 4.4 mm, VW-1, PVC, red and black | 1 |                 |
| 3        | 24-00006    | Overmold, PVC, black  | 1 | PVC, black      |

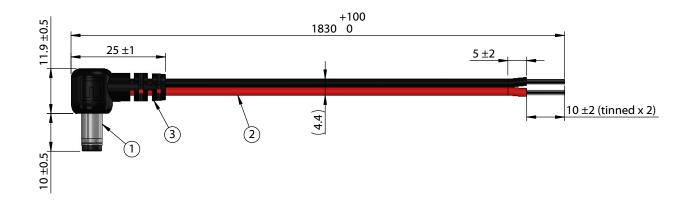



## Notes:

Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

Cable rated for 48 V, 7 A

| Wiring Diagram |            |  |  |  |  |
|----------------|------------|--|--|--|--|
| 50-00129       | wire color |  |  |  |  |
| center         | red        |  |  |  |  |
| sleeve         | black      |  |  |  |  |

| Revision: | Date:     | Description:          | Prepared:  | Notes:  |  |   |                               | 25 26 |              |  |
|-----------|-----------|-----------------------|--|---|--|---|-------------------------------|-------|--------------|--|
| Α         | 7/25/2014 | Initial release       |  | RoHS compliant  |  |   | TENSILITY                     |       |              |  |
| A1        | 5/7/2015  | Updated notes section | Verified:  | Function test: no open, no short circuit, no intermittent     |  | tel 1.541.323.3228 800 877.670.7118<br>fax 1.541.323.4202 web tensility.com |                               |       |              |  |
|           |           |                       | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm | Description:<br>Cable, 1830 mm, 5.5x2.5x10 mm 90° 50-00129 dc |  |   | Size: Part number: A 10-01779 |       |              |  |
|           |           |                       | X.X: ± 0.3 mm<br>X.XX: ± 0.05 mm                       | plug to 10 mm tinned, 18 AWG, 30-00415 R-B wire               |  | Scale:  | 1:1                           |       | Sheet 1 of 1 |  |

5 3 2