

Technical characteristics

Contact resistance	≤2 mΩ
Material (contacts)	Copper alloy
RoHS	compliant with exemption

Specifications and approvals


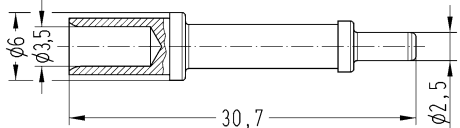
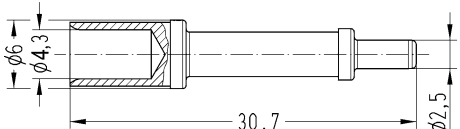

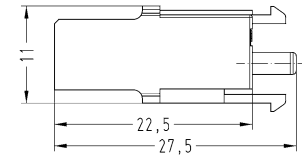
EN 60664-1
IEC 61984

Details

Crimping tools see chapter Han 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm ²)	Part number Male	Drawing (dimensions in mm)
<p>Han-<i>Yellowlock</i>®, PE contact, Crimp termination, Contact surface: Silver plated</p> 	<p>6 10</p>	<p>11 00 000 9509 11 00 000 9510</p>	 <p>Stripping length 7.5 mm</p>  <p>Stripping length 7.5 mm</p>
<p>Han-<i>Yellowlock</i>®, PE contact chamber, Han-Quick Lock® termination, Contact surface: Silver plated</p> 	<p>0.5 ... 2.5</p>	<p>11 05 001 2601</p>	 <p>Stripping length 10 mm</p> 